



STAINLESS STEEL CORD GRIPS WITH STRAIN RELIEF MESH

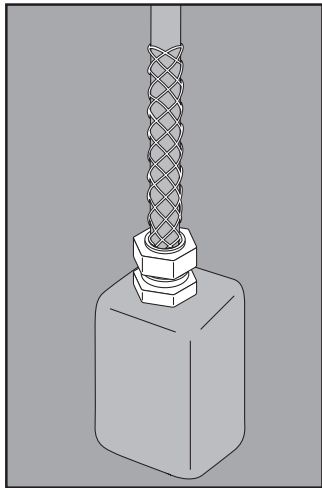

APPLICATION

- Designed to provide a weather-tight means of terminating flexible cord or cable in devices, boxes, and enclosures
- Strain relief mesh helps to prevent over-bending or kinking of the cord and also helps prevent the transfer of tension from the cable to the terminals or joints contained within the device, box or enclosure
- Manufactured in stainless steel to help prevent corrosion
- Can be installed using ordinary hand tools and require little maintenance or repair
- Provided in a bright, polished finish that does not require touch up or painting

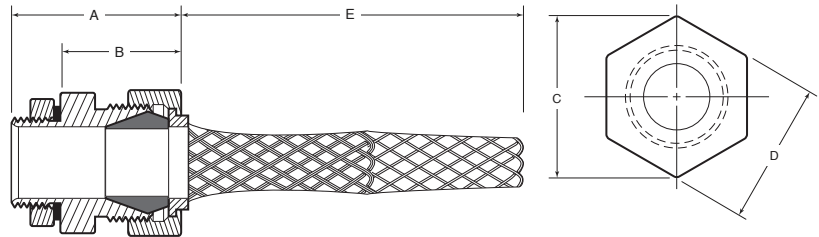

PRODUCT DETAILS

Material:

- Body: CF8M (316 SS)
- Rubber Bushing: EPDM
- Nut: CF8M (316 SS)
- Mesh: 316 SS
- Gasket: Neoprene
- Locknut: 316 SS

Country of Origin: Product may contain imported component. Body, rubber bushing, nut, gasket, locknut are 100% Made in USA; mesh may or may not be of U.S. origin.

Part Number	Size	Cable Range (in.)	Weight/ 100 (lbs.)	-----Dimension (in.)-----				
				A	B	C	D	E
CGM50-125-188	½ in.	.125 - .188	42	1.97	1.47	1.56	1.38	3.50
CGM50-188-250	½ in.	.188 - .250	42	1.97	1.47	1.56	1.38	3.00
CGM50-250-313	½ in.	.250 - .313	42	1.97	1.47	1.56	1.38	4.75
CGM50-313-375	½ in.	.313 - .375	42	1.97	1.47	1.56	1.38	4.75
CGM50-375-438	½ in.	.375 - .438	42	1.97	1.47	1.56	1.38	5.75
CGM50-438-500	½ in.	.438 - .500	42	1.97	1.47	1.56	1.38	5.75
CGM50-500-563	½ in.	.500 - .563	42	1.97	1.47	1.56	1.38	7.50
CGM50-563-610	½ in.	.563 - .610	42	1.97	1.47	1.56	1.38	7.50
CGM75-188-250	¾ in.	.188 - .250	51	2.22	1.60	1.71	1.50	3.25
CGM75-250-313	¾ in.	.250 - .313	51	2.22	1.60	1.71	1.50	4.63
CGM75-313-375	¾ in.	.313 - .375	51	2.22	1.60	1.71	1.50	4.63
CGM75-375-438	¾ in.	.375 - .438	51	2.22	1.60	1.71	1.50	6.00
CGM75-438-500	¾ in.	.438 - .500	51	2.22	1.60	1.71	1.50	6.00
CGM75-500-563	¾ in.	.500 - .563	51	2.22	1.60	1.71	1.50	7.75
CGM75-563-625	¾ in.	.563 - .625	51	2.22	1.60	1.71	1.50	7.75
CGM75-625-688	¾ in.	.625 - .688	51	2.22	1.60	1.71	1.50	8.75
CGM75-688-750	¾ in.	.688 - .750	51	2.22	1.60	1.71	1.50	8.75
CGM75-750-810	¾ in.	.750 - .810	51	2.22	1.60	1.71	1.50	8.75
CGM100-375-438	1 in.	.375 - .438	78	2.37	1.71	2.06	1.81	6.00
CGM100-438-500	1 in.	.438 - .500	78	2.37	1.71	2.06	1.81	6.00
CGM100-500-563	1 in.	.500 - .563	78	2.37	1.71	2.06	1.81	7.63
CGM100-563-625	1 in.	.563 - .625	78	2.37	1.71	2.06	1.81	7.63
CGM100-625-688	1 in.	.625 - .688	78	2.37	1.71	2.06	1.81	8.75
CGM100-688-750	1 in.	.688 - .750	78	2.37	1.71	2.06	1.81	8.75
CGM100-750-813	1 in.	.750 - .813	78	2.37	1.71	2.06	1.81	8.50
CGM100-813-875	1 in.	.813 - .875	78	2.37	1.71	2.06	1.81	8.50
CGM100-875-938	1 in.	.875 - .938	78	2.37	1.71	2.06	1.81	10.00
CGM100-938-1000	1 in.	.938 - 1.000	78	2.37	1.71	2.06	1.81	10.00

