



# STAINLESS STEEL- HAZARDOUS LOCATION FITTINGS

## EYS SEALING FITTINGS

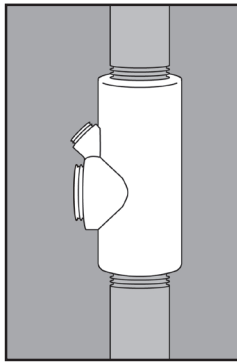

### APPLICATION

- Also known as seal offs
  - Used in hazardous area locations to help "seal off" and prevent vapors, gases, etc. from passing from one section of a conduit system to another
  - Can be used for horizontal or vertical applications
  - Hold the following ratings:
    - CL I, DIV 1 & 2, Groups A, B, C, D
    - CL II, DIV 1 & 2, Groups E, F, G
    - CL III
- (When used with Crouse-Hinds Chico® A sealing compound and Chico® X fiber.)
- Manufactured in stainless steel to help prevent corrosion
  - Can be installed using ordinary hand tools and require little maintenance or repair
  - Provided in a bright, polished finish that does not require touch up or painting

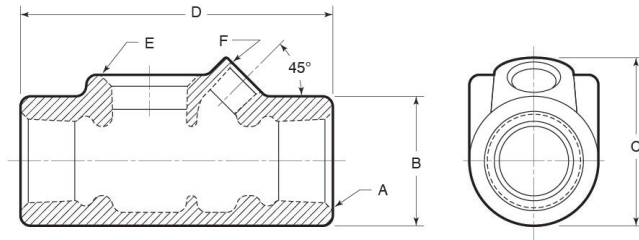

### PRODUCT DETAILS

#### Material:

- Body: CF8M (316 SS)
- Plug: 316 SS

**Country of Origin:** 100%  
Made in USA

#### \*UL File Number:

EBNV.E472023  
(Standard 1203)

#### \*Canada UL File Number:

EBNV7.E472023  
(Standard 1203)

\*When used with Crouse-Hinds  
Chico® A sealing compound and  
Chico® X fiber.

Part Number	Size	Weight/ Each (lbs.)	Dimension (in.)					
			A	B	C	D	E	F
EYS75	¾ in.	1	¾ - 14 NPT	1.50	1.97	3.63	¾ - 14 NPT	¼ - 18 NPT
EYS100	1 in.	2	1 - 11-½ NPT	1.75	2.22	4.25	1 - 11-½ NPT	¼ - 18 NPT

