



STAINLESS STEEL U-BOLTS (FIGURE 137 STYLE)

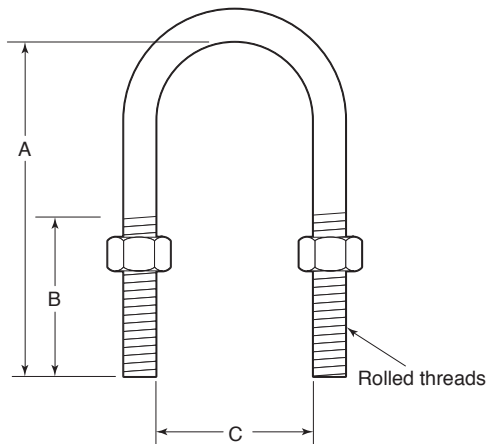

APPLICATION

- Used to run and support conduit or pipe in electrical systems
- Offered in two styles for both rigid conduit and mechanical applications (Figure 137 Style U-Bolts)
- Supplied complete with one Type 316 SS hex nut on each leg
- Manufactured in stainless steel to help prevent corrosion
- Can be installed using ordinary hand tools and require little maintenance or repair
- Provided in a bright, polished finish that does not require touch up or painting



PRODUCT DETAILS

Material:

U-Bolt, Hex Nuts: 316 SS

Standards:

ASTM A193 B8M Class I, ASTM F593

Country of Origin:

Manufactured in USA; hex nuts and raw material for U-Bolt may or may not be of U.S. origin

Part Number	Pipe/Rigid Conduit Size	Load Rating (lbs.)	Weight/ 100 (lbs.)	-----Dimension (in.)-----			Size & Pitch
				A	B	C	
0050-137	½ in.	485	9	3.22	2.13	0.94	¼ - 20
0075-137	¾ in.	485	10	3.31	2.13	1.13	¼ - 20
0100-137	1 in.	485	10	3.44	2.13	1.38	¼ - 20
0125-137	1-¼ in.	1220	26	3.72	2.13	1.69	⅜ - 16
0150-137	1-½ in.	1220	28	4.00	2.50	2.00	⅜ - 16
0200-137	2 in.	1220	30	4.47	2.50	2.44	⅜ - 16
0250-137	2-½ in.	2260	66	5.22	3.00	2.94	½ - 13
0300-137	3 in.	2260	72	5.78	3.00	3.56	½ - 13
0350-137	3-½ in.	2260	77	6.28	3.00	4.06	½ - 13
0400-137	4 in.	2260	83	6.78	3.00	4.56	½ - 13



© 2015 GIBSON STAINLESS & SPECIALTY, INC. - REV 12/2015

PO BOX 847, GREENSBURG, PA 15601
PHONE: 1-800-945-4316 • FAX: 724-838-1544

WEB: GIBSONSTAINLESS.COM