


STAINLESS STEEL TB CONDUIT BODIES

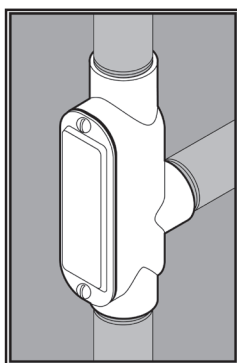

APPLICATION

- Designed to make 90° bends, change the route of conduit, and/or to make wiring pulls and connections
- Flat back design provides extra wiring capacity
- Form 8
- Offered in seven configurations: C, LB, LL, LR, T, TB, X
- Supplied complete with cover, gasket and Type 316 SS screws
- Manufactured in stainless steel to help prevent corrosion
- Can be installed using ordinary hand tools and require little maintenance or repair
- Provided in a bright, polished finish that does not require touch up or painting

PRODUCT DETAILS

Material:

- Body: CF8M (316 SS)
- Cover, Screws: 316 SS
- Gasket: Neoprene

Standards:

ASTM A351, ASTM A240,
ASTM F593

Country of Origin:


100% Made in USA

UL File Number:

QCIT.E300676
(Standard 514A)

Canada UL File Number:

DWTT7.E300676
(Standard 514A)

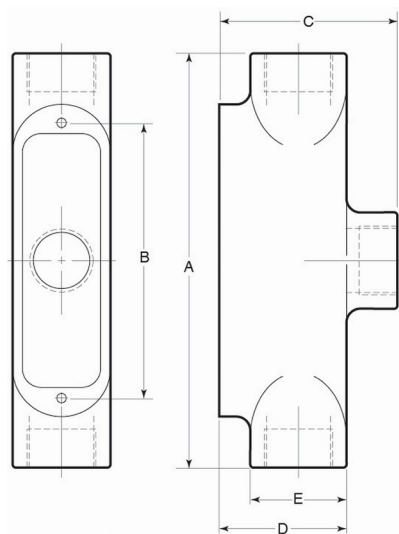

Part Number	Conduit Size	Weight/ Each (lbs.)	Dimension (in.)				
			A	B	C	D	E
7075TB	¾ in.	3	6.61	4.31	2.88	2.00	1.50
7100TB	1 in.	3	7.53	5.00	3.23	2.31	1.75
7125TB	1-¼ in.	5	8.75	6.00	3.50	2.50	2.13
7150TB	1-½ in.	6	9.38	6.56	3.75	2.75	2.31
7200TB	2 in.	9	11.50	8.50	4.38	3.38	2.75

