



STAINLESS STEEL SPACERS



APPLICATION

- Strip of stainless steel material used in place of a clamp back spacer to provide a 1/4" space between rigid conduit and a mounting surface
- Designed for use with Gibson Stainless one hole straps
- Manufactured in stainless steel to help prevent corrosion
- Can be installed using ordinary hand tools and require little maintenance or repair
- Provided in a bright, polished finish that does not require touch up or painting

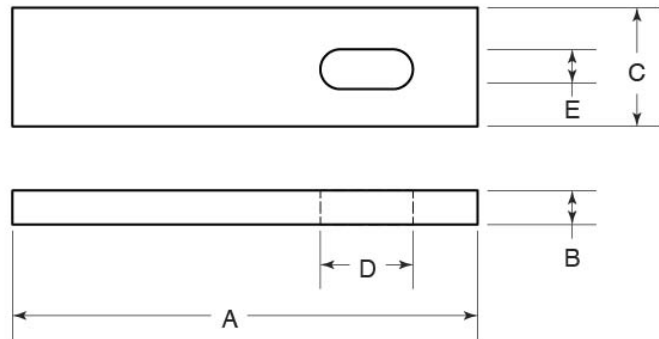

PRODUCT DETAILS

Material:

316 SS

Standards:

ASTM A240

Country of Origin:

100% Made in USA

Part Number	Pipe/Rigid Conduit Size	Use with Gibson Part #	Weight/ 100 (lbs.)	Dimension (in.)				
				A	B	C	D	E
CBS3050	1/2 in.	3050	12	2.50	0.25	0.90	0.56	0.26
CBS3075	3/4 in.	3075	14	2.50	0.25	0.90	0.56	0.26
CBS3100	1 in.	3100	17	2.75	0.25	0.95	0.76	0.38
CBS3125	1-1/4 in.	3125	21	3.13	0.25	1.05	0.76	0.38
CBS3150	1-1/2 in.	3150	29	3.90	0.25	1.12	0.86	0.44
CBS3200	2 in.	3200	34	4.50	0.25	1.26	1.05	0.57
CBS3250	2-1/2 in.	3250	43	5.00	0.25	1.35	1.05	0.57
CBS3300	3 in.	3300	49	5.75	0.25	1.35	1.05	0.57
CBS3350	3-1/2 in.	3350	61	7.00	0.25	1.35	1.05	0.57
CBS3400	4 in.	3400	61	7.00	0.25	1.35	1.05	0.57



© 2018 GIBSON STAINLESS & SPECIALTY, INC. - REV 3/2018

PO BOX 847, GREENSBURG, PA 15601
PHONE: 1-800-945-4316 • FAX: 724-838-1544

WEB: GIBSONSTAINLESS.COM